

## How to Disassemble LG Nexus 5 for Parts Repair



Repair Tools BST-8921 (38 pcs/set)

SKU: ESTOL140506101137




**01** Power off the Nexus 5 and remove the SIM card tray.



**02** Use the plastic pry tool and case opening tool to remove the Nexus 5 battery door.



**03** Remove the Nexus 5 vibrating motor on the battery door with the tweezers.

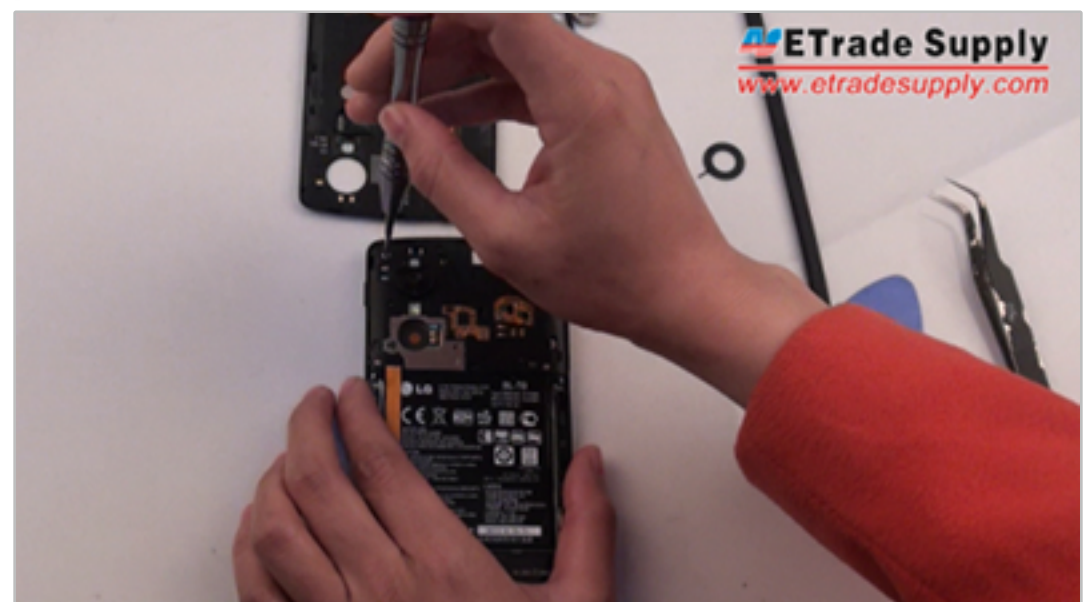

**04-1** Unscrew six screws at the top of the phone to remove the Nexus 5 rear housing.



**04-2** Unscrew six screws at the top of the phone to remove the Nexus 5 rear housing.



**05** Unscrew four screws holding the Nexus 5 loud speaker module in place.





**06** Use the plastic pry tool to remove the Nexus 5 loud speaker module.



**07** Lift the Nexus 5 battery after disconnect the battery connector.




**08** Disconnect the display flex, unplug the 4G antenna cable (white color) and 3G antenna cable (black color) on the Nexus 5.




**09** Gently lift the Nexus 5 charging port flex cable up and use the tweezers to remove the rest part of Nexus 5.



**10** To remove the Nexus 5 mainboard, you need to disconnect the rear-facing camera connector, front-facing camera connector and unplug the 3G/GSM and 4G antenna cable connectors.

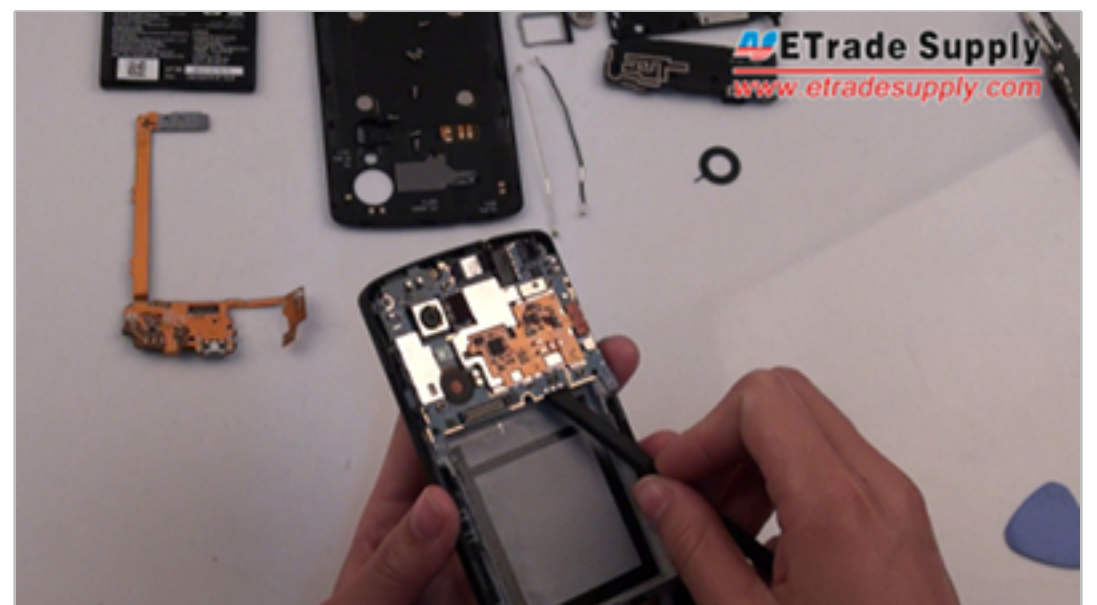

**11** Remove the Nexus 5 mainboard gently.

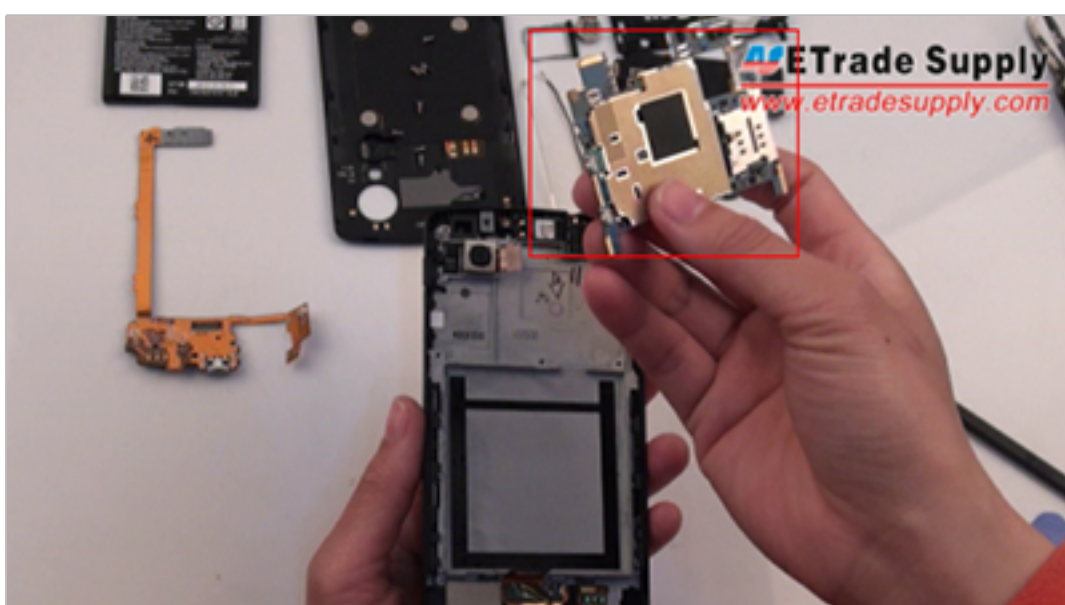

**12** You can lift the metal shield underneath the Nexus 5 mainboard for fixing the mobile damaged. Then clear and dry it.



**13** Remove the 8MP rear-facing camera of Nexus 5 with the tweezers.






**14** Carefully remove the Nexus 5 1.3Mp front-facing camera after peeling off the rubber piece.




**15** Remove the Nexus 5 earphone jack with the pry tool.



**16** Remove the Nexus 5 ear speaker.

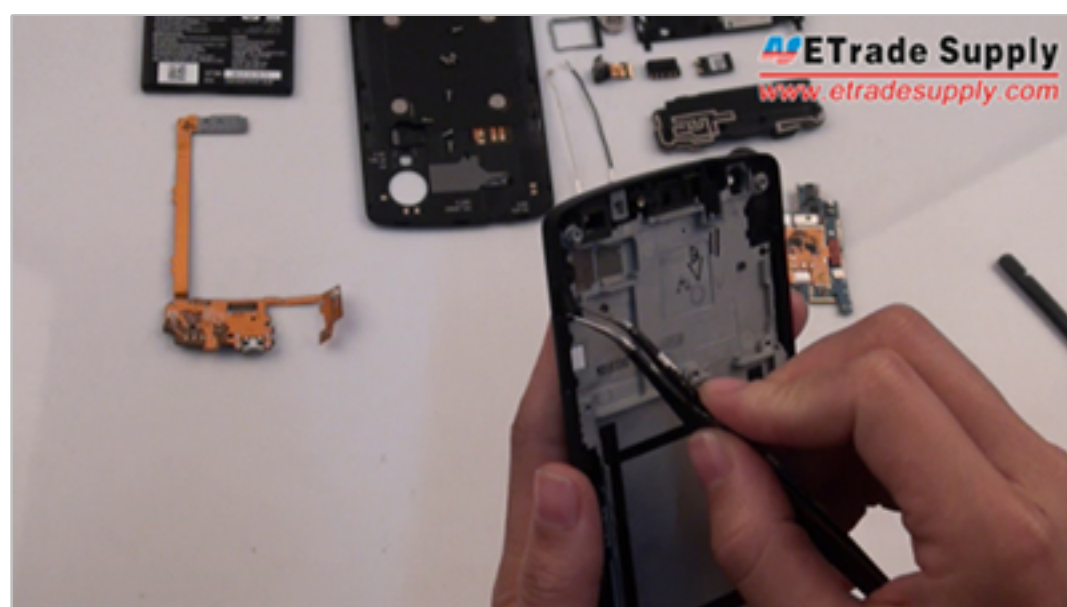

**17** Peel off the Nexus 5 power button and volume button with the tweezers.

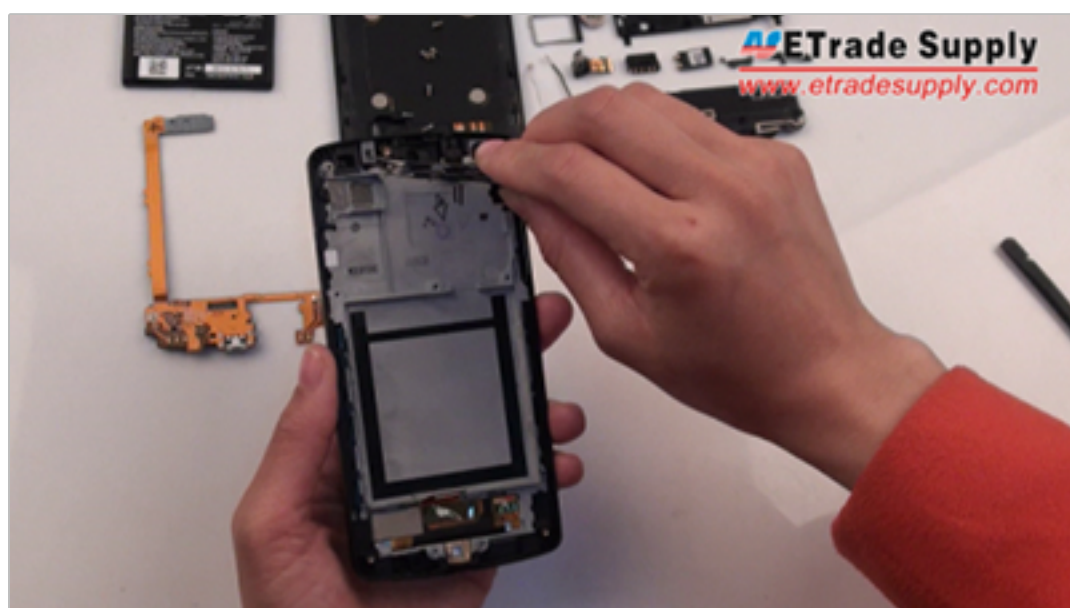

**18** Remember to remove the rubber microphone gasket on Nexus 5 if the new screen replacement part you purchase does not include it.



**19** The phone gasket prevents dust from getting between the proximity sensor and the glass screen. If the new Nexus 5 screen replacement part comes without it, you have to remove it to use on your new screen.