

iPhone 6 Plus Disassemble Tutorial



Apple iPhone 4 5-Star Pentalobe Screwdriver

SKU: ESAPP10008520-NG



01 Power off the iPhone 6 Plus.



02 Undo the 2 charging port screws.



03 Separate the LCD assembly from rear housing assembly with suction cup tool and case opening tool. (Notice: be careful not to break the flex ribbons.)



04-1 Pry up the 5 screws that locking the metal cover above LCD assembly connectors.



04-2 Then take out the metal cover.



05 Pry up the 4 connectors.


iPhone 6 Plus Disassemble Tutorial




06 The LCD assembly and rear housing assembly are separated.



07-1 Undo the 3 screws that locking the metal cover above home button.

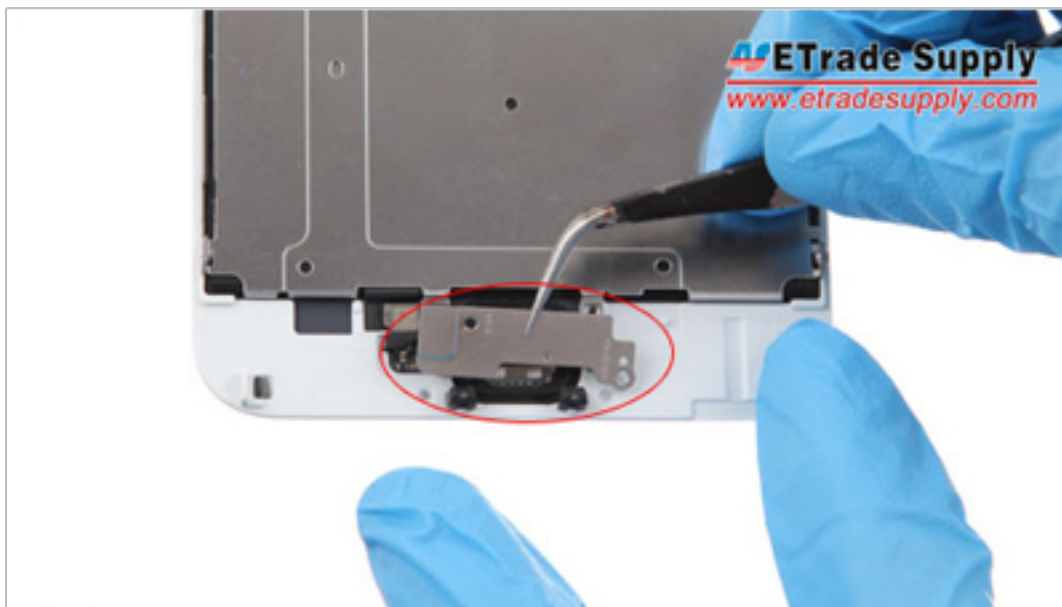

07-2 Then take out the metal cover.

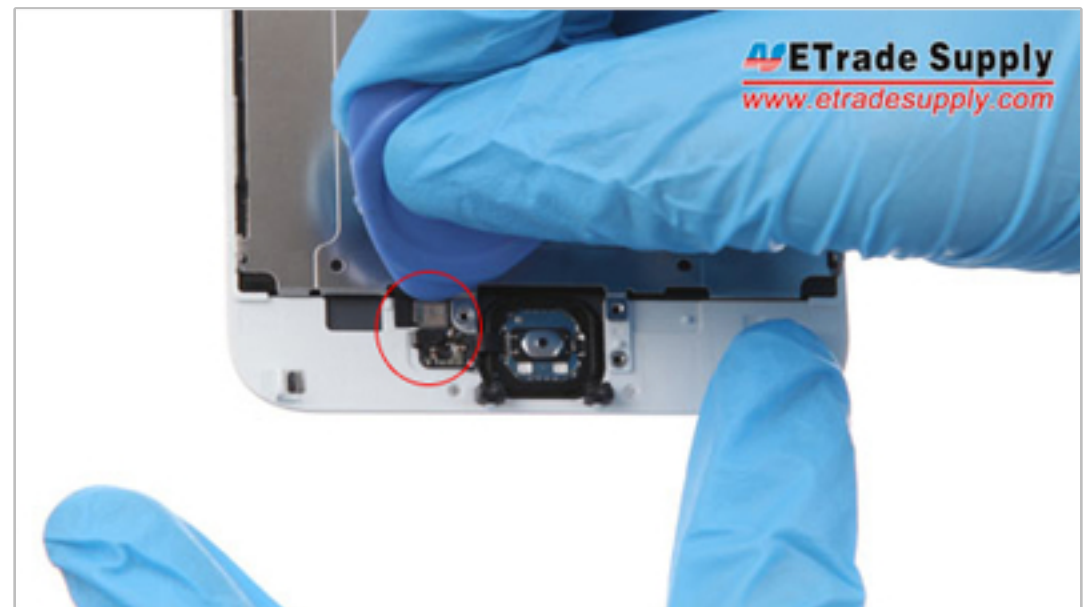

08-1 Pry up the home button flex ribbon connector



08-2 And remove the home button.



09-1 Undo the 3 screws that locking the metal cover above ear speaker.





09-2 Take out the metal cover.



10-1 Take out the ear speaker.

iPhone 6 Plus Disassemble Tutorial

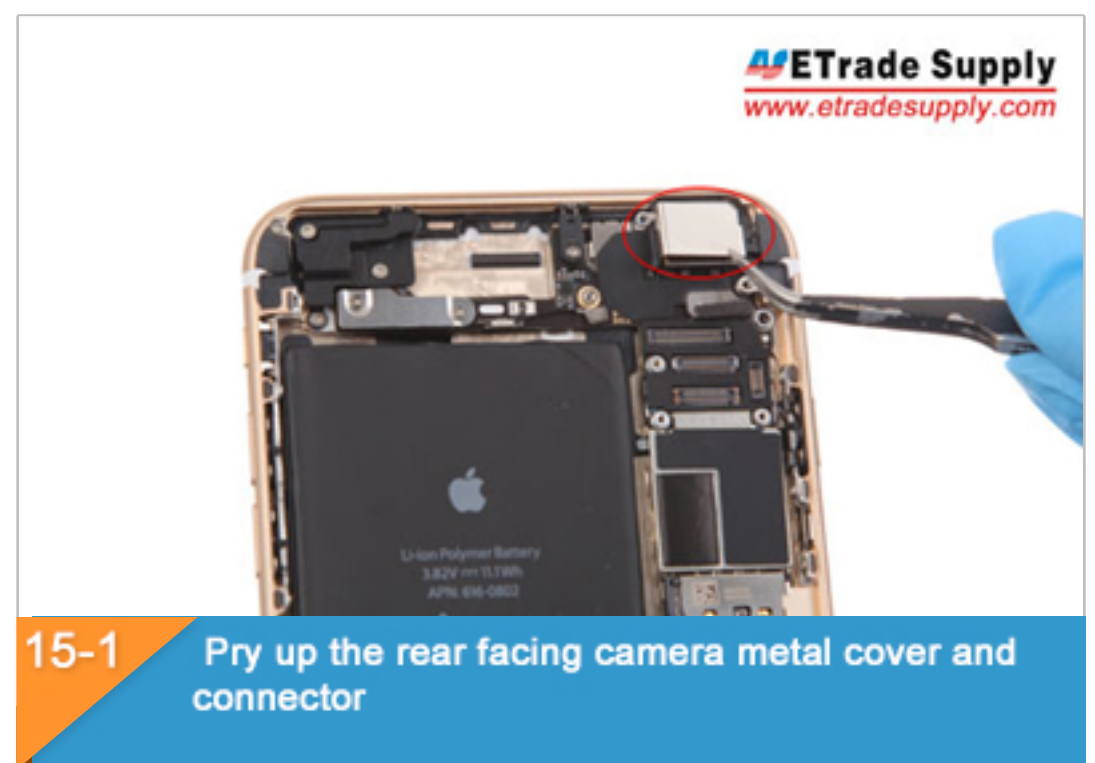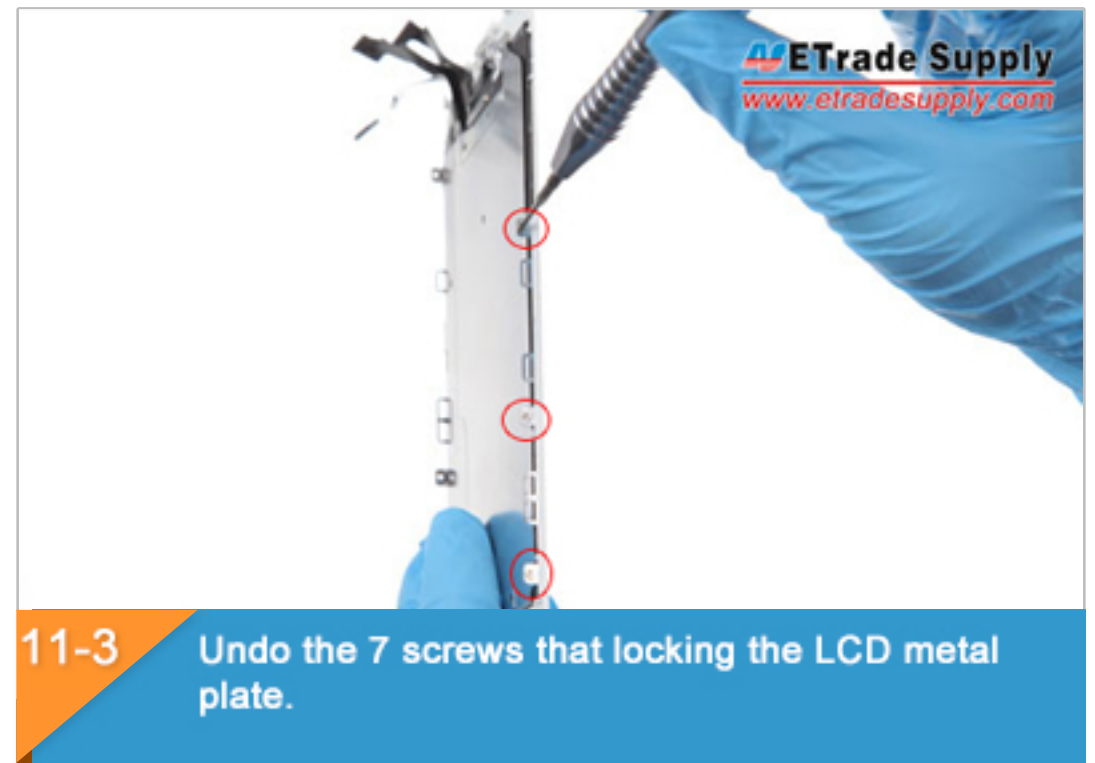

iPhone 6 Plus Disassemble Tutorial



15-2 Pry up the rear facing camera metal cover and connector



15-3 Take out the back camera.



16 Undo the 4 screws.



17-1 Remove the metal cover.



17-2 Then pry up the connectors.



18 Undo the screw under the connector.



19-1 Remove the metal cover .




19-2 And pry up the two connectors underneath.

iPhone 6 Plus Disassemble Tutorial



20 Remove the wifi antenna. (Notice: the wifi antenna is connected with the motherboard, be careful.)

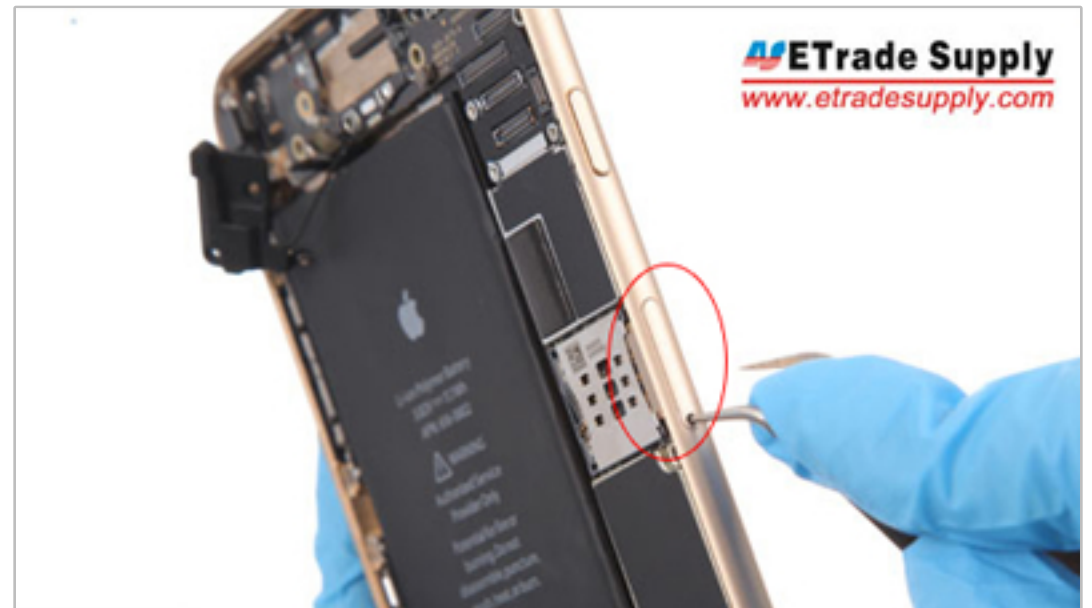

21-1 Use an eject pin or tweezers to release the SIM card tray.



21-2 Use an eject pin or tweezers to release the SIM card tray.



22 Remove the motherboard.



23 Undo the 3 screws and remove the loud speaker assembly.



24-1 Undo the 4 screws




24-2 And remove the charging port metal cover.



25-1 Pry up the antenna


iPhone 6 Plus Disassemble Tutorial

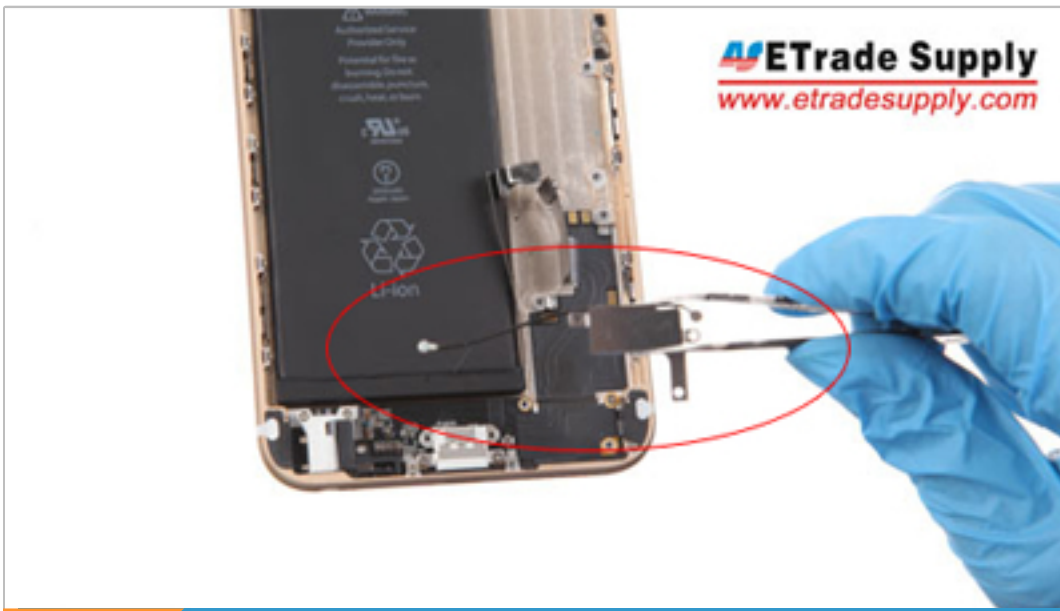

25-2 and take out the vibrating motor.



26 Gently pry up the battery.

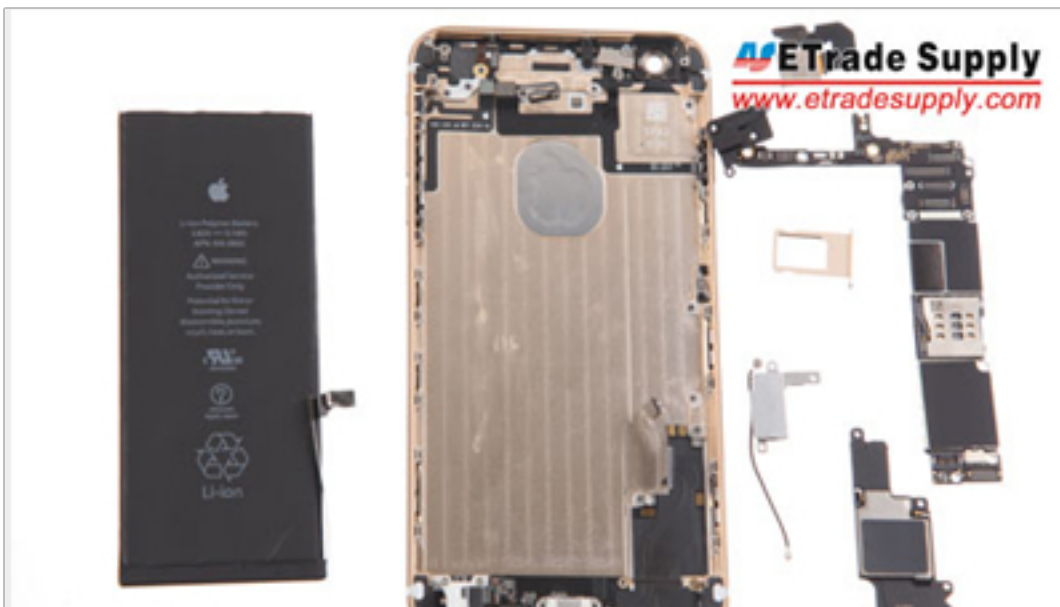

27 The rear housing assembly was disassembled.



28 The iPhone 6 Plus disassembly was finished.